

V-3FP

FLANŞLI, PEDLİ KÜRESEL VANA (3 PARÇALI)

FLANGED BALL VALVE WITH MOUNTING PAD (WITH 3 PIECES)

- Ayaralanabilir gövde sızdırmaz contası
- Hava sızdırmayı engelleyen gövde tasarımı
- Tesisatı sökmeden tamir imkanı
- Su altında 10 Bar'da, açık ve kapalı pozisyonlarda 100 % hava testi yapılmıştır.

Özellikler

- Çalışma Basıncı : PN 40
- Sıcaklık Aralığı : -50°C + 210°C
- F/F : DIN 3201 F1
- Flanş Boyutları : 150 (DIN) PN 25 / 40
- Bağlantı Tipi : Flanşlı
- Tam Geçişli : 1/2" – 4"

Seçenekler

- Blok kilitleme parçası


- Adjustable Stem Packing
- Blow-out-proof Steam Design
- In-line repairable
- % 100 Test air under water, at 100 psi, open and closed positions.

Specifications


- Working Pressure : PN 40
- Temperature Range : -50°C To 210°C
- Face To Face : DIN 3202 F1
- Flanged Dimension : ISO (DIN) PN 25 / 40
- End Type : Flanged End
- Full Bore : 1/2" – 4"

Options

- Padlocking device

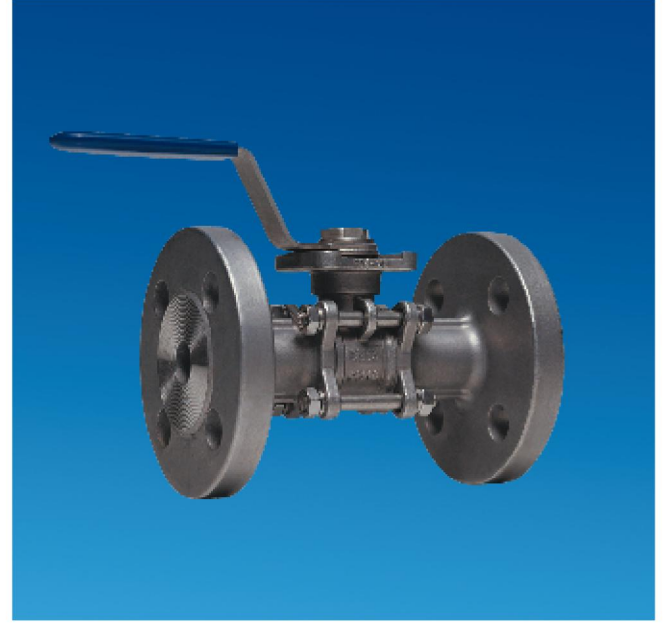

PRESSURE-TEMPERATURE RATING

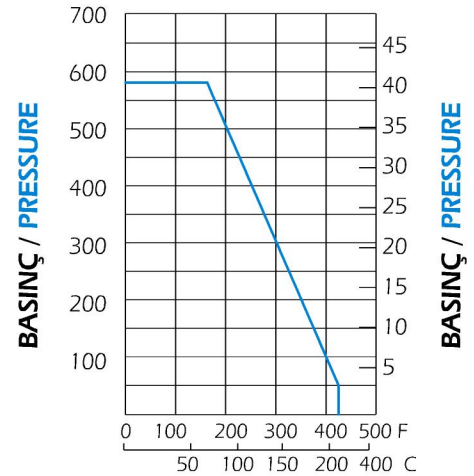

ISI / TEMPERATURE

Uygulamalar / Application

Yiyecek ve genel kimyasal uygulamalarda kullanılır.
For food and general chemical service application.


Montaj / Installation

Montaj her pozisyonda yapılır.
Installation is in all positions.

V-3FP

FLANŞLI, PEDLİ KÜRESEL VANA (3 PARÇALI)

FLANGED BALL VALVE WITH MOUNTING PAD (WITH 3 PIECES)

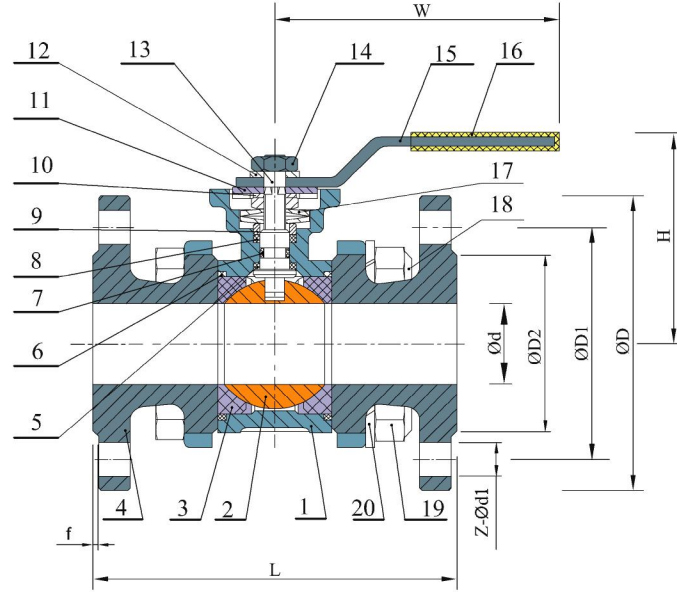

YEDEK PARÇALAR / SPARE PARTS

No	Parça adı / Part name	Malzeme / Material	ADET / QTY
1	Gövde / Body	CF8M (1.4408)	1
2	Küre / Ball	SS 316	1
3	Küre Siti / Ball Seat	PTFE	2
4	Kapak / Cap	CF8M (1.4408)	2
5	Basınçlı Ayar Pulu / Thrust Washer	PTFE	1
6	Gövde Contası / Body Gasket	PTFE	2
7	O-Ring	Viton	1
8	Sızdırmaz Contası / Stem Packing	PTFE	1
9	Salmastra / Gland	SS 316	1
10	Pul / Tab Washer	SS 304	1
11	Tapa / Stopper	SS 304	1
12	Yay Pulu / Spring Washer	SS 304	1
13	Mil / Stem	SS 316	1
14	Somun / Nut	SS 304	2
15	Kol / Handle	SS 304	1
16	Kol Kaplaması / Handle Cover	SS 304	1
17	Sızdırmazlık ringi / Belleville Washer	SS 301	2
18	Civata / Bolt	SS 304	4 (6)
19	Somun / Nut	SS 304	8 (12)
20	Yay Pulu / Spring Washer	SS 304	8 (12)

BOYUTLAR / DIMENSIONS

SIZE	d	D	L	H	W	D1	D2	f	Z-ØZ1	ISO5211	N.m	Kgs
DN15	15	95	130	84	146	65	45	2	4-Ø14	F04	5	2.30
DN 20	20	105	150	87	146	75	58	2	4-Ø14	F04 / F05	8	3.15
DN 25	25	115	160	93	153	85	68	2	4-Ø14	F04 / F05	10	4.15
DN 32	32	140	180	99	153	100	78	2	4-Ø18	F05 / F07	14	5.30
DN 40	40	150	200	114	217	110	88	3	4-Ø18	F05 / F07	18	6.50
DN 50	50	165	230	122	217	125	102	3	4-Ø18	F05 / F07	25	10.1
DN 65	65	185	290	150	251	145	122	3	8-Ø18	F07 / F10	48	15.8
DN 80	80	200	310	161	251	160	138	3	8-Ø18	F07 / F10	75	20.2
DN 100	100	235	350	180	291	190	162	3	8-Ø22	F07 / F10	110	33.5

AYVAZ HACI AYVAZ ENDÜSTRİYEL MAMÜLLER
SANAYİ VE TİCARET A.Ş.
www.ayvaz.com

Atatürk Sanayi Bölgesi, İstasyon Mah. Mustafa İnan Cad. No: 36
34860 Hadımköy - İSTANBUL - TÜRKİYE
Tel : 90(212) 771 01 45 (pbx)
Fax : 90(212) 771 37 34 - 90(212) 771 25 60, e-mail : info @ ayvaz.com.tr

DİSTRİBÜTÖR